

Goslyn - GOS80 Cut Sheet

Automatic Grease Removal Device

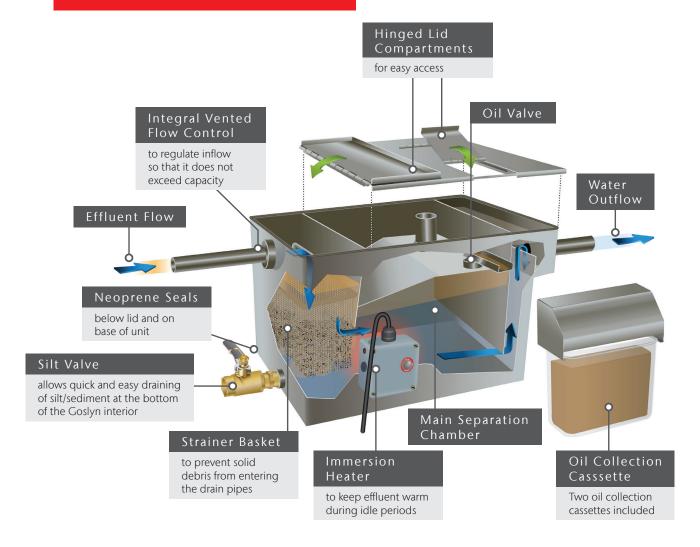

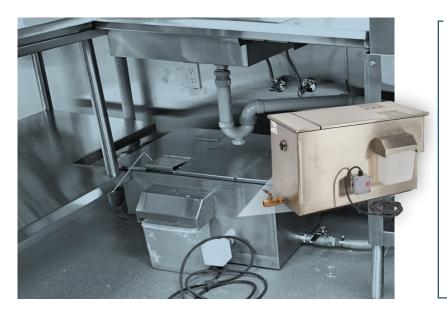

GOS80 – STANDARD FEATURES

- Heavy duty 14 gauge, grade 304 stainless steel exterior construction
- The Goslyn meets (and exceeds) the industry codes and standards including UL, IPC, UPC, IRC, NPC, ASME A112.14.3, ASME A1123.14.4, PDI G101, and CSA B481.1
- 5 year limited warranty
- Unique system design allows for multiple discharging configurations
- No moving parts
- 25 GPM unit



Goslyn products outperform other systems on the market

Goslyn is an industry leader in grease removal with its line of sustainable and environmentally friendly automatic grease removal devices and related solutions. Its patented, high-efficiency, cost-effective automatic grease removal devices have a range of unique features and benefits that set it apart from other systems on the market.

Features and Benefits

- No moving parts and less maintenance time
- Small footprint for simple installation and retrofit
- Made from strong, durable, lightweight and hygienic grade 304 stainless steel
- Maintains a 96.4% grease removal efficiency, higher than other systems on the market

Customers across a wide range of industries leverage Goslyn solutions to ensure they have an effective and reliable system in place. Due to the durability and overall longevity of its products, customers also benefit from a positive return on investment.

Take the next step in protecting your business's bottom line, while helping the environment, by choosing a Goslyn solution for your business today by visiting www.goslyn.com or calling 888-490-9552.

MODEL	PART NO.	GPM	LENGTH IN. (mm)	WIDTH IN. (mm)	HEIGHT IN. (mm)	WEIGHT LBS.
GOS80	139580	25	33.38" (848 mm)	15.98" (406 mm)	19.77" (502 mm)	135.0

^{*}Length does not include Silt Valve, and Width does not include 3.5" for cassette and oil shroud

ACO, Inc.

West Sales Office 825 W. Beechcraft Street Casa Grande, AZ 85122 Tel: (520) 421-9988 Toll-Free: (888) 490-9552

goslyn@aco.com www.goslyn.com



ACO. we care for water



Fax: (520) 421-9899