

Hinged Lid Compartments

Neoprene Seals at Base and Below Lid

Oil Valve

Integral Vented Flow Control

Effluent Inflow

Strainer Basket

Silt Valve

Water Outflow

Immersion Heater

Main Separation Chamber

Oil Collection Cassette

Goslyn GOS40

10 GPM Automatic Grease Removal Device

Goslyn products outperform other systems on the market

Goslyn is an industry leader in grease removal with its line of sustainable and environmentally friendly automatic grease removal devices and related solutions. Its patented, high-efficiency, cost-effective automatic grease removal devices have a range of unique features and benefits that set it apart from other systems on the market.




 **goslyn**[®]
an ACO, Inc. division

Efficiency and Effectiveness

In the foodservice industry environment, untold amounts of fats, oils and greases (FOG) mix with water and end up flushed down the drain. FOG-polluted water is costly. It adversely affects our sewage systems, clogs our drains and pollutes our environment, especially when grease traps are not properly maintained.

So why not stop FOG at its source?

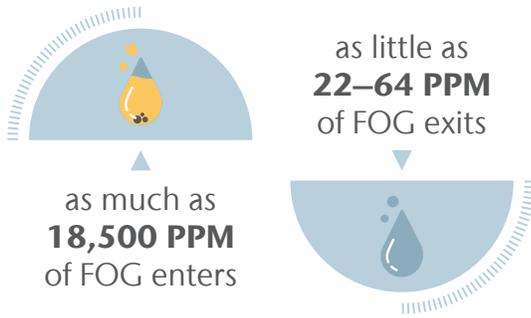

- ~99.6% total FOG removal efficiency
- Maintains a 96.4% grease removal efficiency, higher than other systems on the market

Convenient Compact Build

Goslyn GOS40 features a unique system design which allows for multiple discharging configurations while maintaining a small footprint for simple installation and retrofitting.

Durability and Low Maintenance

Customers across a wide range of industries leverage Goslyn solutions to ensure they have an effective and reliable system in place. Due to the durability and overall longevity of its products, customers also benefit from a positive return on investment.

- Heavy-duty 14 gauge, grade 304 stainless steel exterior construction
- No moving parts = less maintenance
- 5 year limited warranty



ACO, Inc.

825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988


goslyn@aco.com

© July 2024 ACO, Inc.
All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

GOS20 Details

Part No.	139540
Flow Rate	10 GPM
Height	14.27" (362 mm)
Length ¹	25.36" (644 mm)
Width ²	15.98" (406 mm)
Height to Inlet Center ³	10.00" (254 mm)
Height to Outlet Center ³	7.80" (198 mm)
Weight	75.0 lbs

1. Length does not include Silt Valve.
2. Width does not include 3.5" for cassette and oil shroud.
3. Inlet/Outlet height is measured to the center.

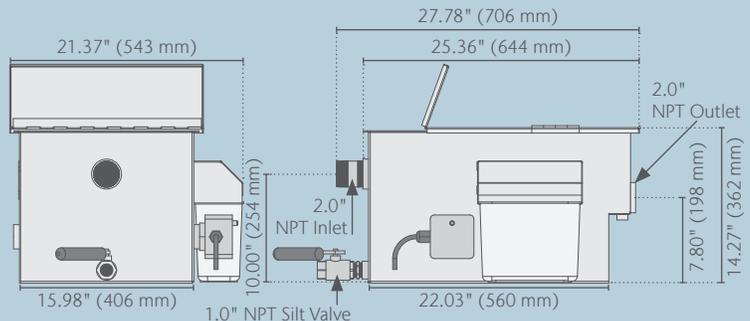

Typical Applications



Goslyn GOS40 meets (and exceeds) the industry codes and standards including UL, IPC, UPC, IRC, NPC, ASME A112.14.3, ASME A112.14.4, PDI G101, and CSA B481.1



ACO. we care for water

