



Goslyn - GOS320

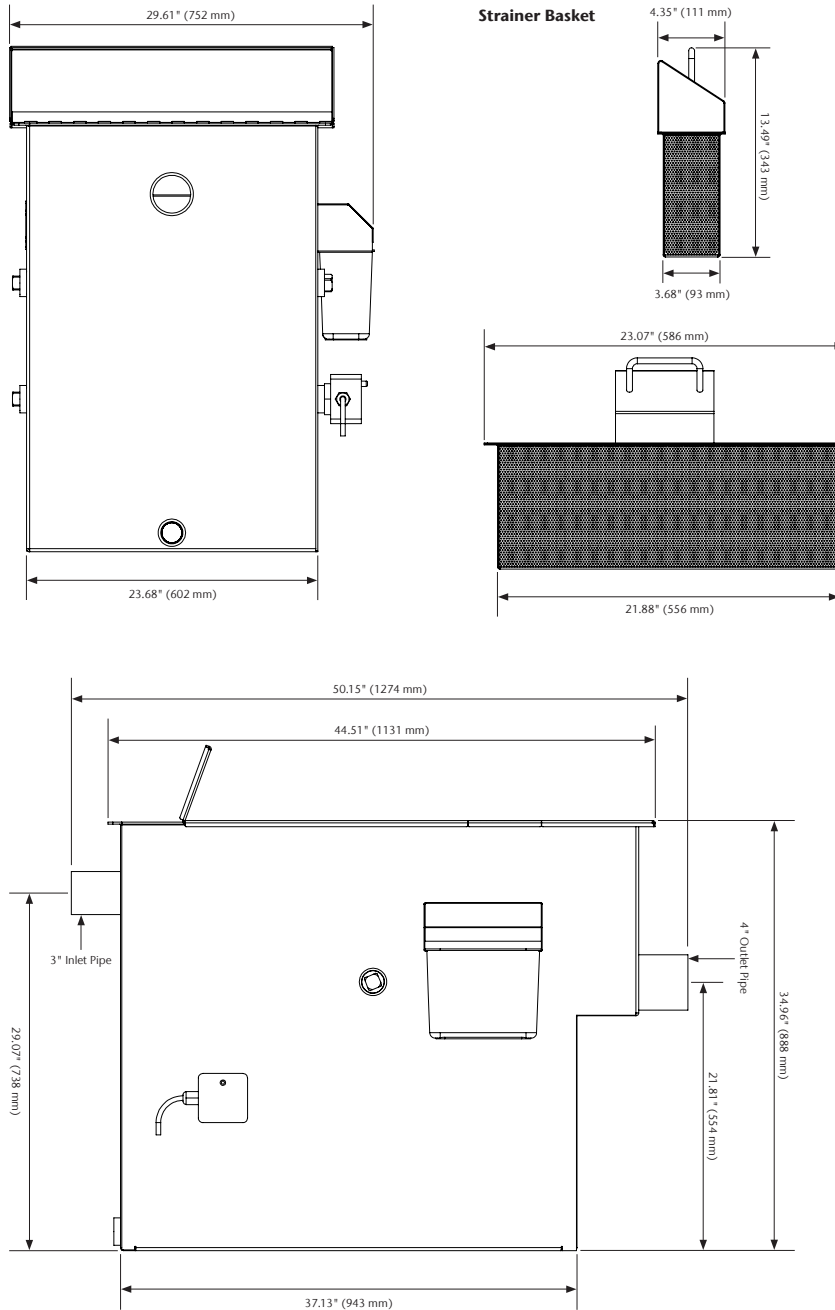

Specification Clause
 Shall be a Goslyn Model: GOS320 grease removal device / immiscible liquid separator which continuously operates under hydro static pressure with no moving parts. Is made of 2 mm, 304 stainless steel and comes standard with two (2) immersion heaters. It has a capacity of 100 gallons per minute.

Electrical Requirements
 • (2) 110 Volt, 1000 Watts, 9 Amps within 5' of unit

Required Clearances
 • Headroom needed above strainer basket: 12"
 • 3" inlet pipe
 • 4" outlet pipe
 • Access to front Oil Cassette
 • Access to hinged lid for Oil Valve

The Goslyn Outlet may discharge either indirectly (e.g., into a floor sink) or directly to a drain pipe.

ACO recommends checking local plumbing codes prior to installation.

Part No.	ACRD Separator	Weight lbs
GOS320	139532 100 GPM	260.0

ACO, Inc.
 West Sales Office
 825 W. Beechcraft Street
 Casa Grande, AZ 85122
 Tel: (520) 421-9988
 Toll-Free: (888) 490-9552
 Fax: (520) 421-9899

goslyn@aco.com
 www.acousa.com
 www.goslyn.com



© April 2022 ACO, Inc.
 All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

ACO Specification Information